

SUPER-ELASTIC

FORZA

FORZA NON MARKING



STRUCTURE

- Excellent load capacity.
- Good stability and maximum safety.
- Good rolling resistance.





COMPOUND

- Tread built with abrasion-resistant compound.
- Guaranteed grip and excellent traction drive.

DESIGN

- High performance groove base for long lasting SE.
- Modern and highly functional tread.
- Low noise level and good driving comfort.

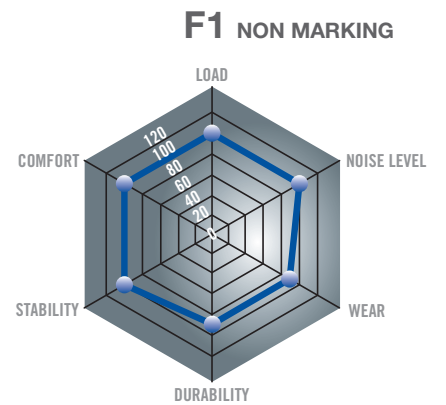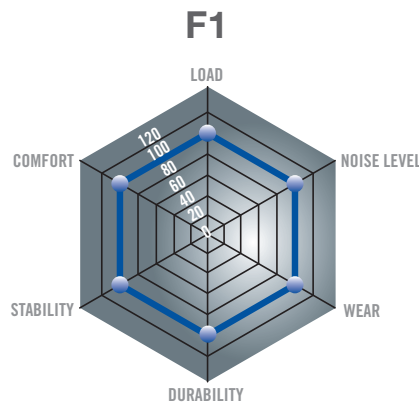

NM
NON MARKING



SUPER-ELASTIC FORZA

Ø	TYRE SIZE (INCHES)	PROFILE	RIM SIZE	TYRE DIMENSIONS (1)		WEIGHT (kg) ± 2%	LOAD CAPACITY (KG) AT MAX SPEED (KM/H) (2)				
				W (mm) ± 2%	D (mm) ± 2%		CARRYING WHEEL 25 km/h	STEERING WHEEL 25 km/h	TRAILERS (3)		
							25 km/h	25 km/h	25 km/h	10 km/h	6 km/h
8"	5.00-8	F1	3.00D-8	119	451,4	15,4	1.415	1.090	1.090	1.285	1.415
	5.00-8	FIX F1	3.00D-8	119	451,4	15,8	1.415	1.090	1.090	1.285	1.415
	15x4½-8 (125/75-8)	F1	3.00D8	108	372,5	9,0	1.040	800	800	940	1.040
	15x4½-8 (125/75-8)	FIX F1	3.00D8	108	372,5	9,2	1.040	800	800	940	1.040
	16x6-8 (150/75-8)	F1	4.33R-8	145	412,5	15,3	1.455	1.120	1.120	1.320	1.455
	16x6-8 (150/75-8)	FIX F1	4.33R-8	145	412,5	15,5	1.455	1.120	1.120	1.320	1.455
	18x7-8 (180/70-8)	F1	4.33R-8	149	450,2	18,9	2.145	1.650	1.650	1.945	2.145
	18x7-8 (180/70-8)	FIX F1	4.33R-8	149	450,2	19,1	2.145	1.650	1.650	1.945	2.145
9"	140/55-9*	F1	4.00E-9	130	380	9,7	1170	900	900	1060	1.170
	140/55-9*	FIX F1	4.00E-9	130	380	10	1170	900	900	1060	1.170
	6.00-9	F1	4.00E-9	135	527	24,2	1.885	1.450	1.450	1.710	1.885
	6.00-9	FIX F1	4.00E-9	135	527	24,4	1.885	1.450	1.450	1.710	1.885
	21x8-9 (200/75-9)	F1	6.00E-9	175	521	31,9	2.755	2.120	2.120	2.505	2.755
	21x8-9 (200/75-9)	FIX F1	6.00E-9	175	521	32,4	2.755	2.120	2.120	2.505	2.755
10"	6.50-10	F1	5.00F-10	160	572	33,5	2.340	1.800	1.800	2.125	2.340
	6.50-10	FIX F1	5.00F-10	160	572	33,8	2.340	1.800	1.800	2.125	2.340
	200/50-10	F1	6.50F-10	185	455	23,5	2.470	1.900	1.900	2.240	2.470
	200/50-10	FIX F1	6.50F-10	185	455	23,4	2.470	1.900	1.900	2.240	2.470
	23x9-10 (225/75-10)	F1	6.50F-10	192	579	43,3	3.445	2.650	2.650	3.125	3.445
	23x9-10 (225/75-10)	FIX F1	6.50F-10	192	579	43,5	3.445	2.650	2.650	3.125	3.445
12"	7.00-12	F1	5.00S-12	168	653	45,3	2.920	2.240	2.240	2.645	2.920
	7.00-12	FIX F1	5.00S-12	168	653	45,8	2.920	2.240	2.240	2.645	2.920
	23x10-12	F1	8.00G-12	227	579	46,3	3.770	2.900	2.900	3.420	3.770
	23x10-12	FIX F1	8.00G-12	227	579	46,8	3.770	2.900	2.900	3.420	3.770
	27x10-12	F1	8.00G-12	227	672	68,2	3.900	3.000	3.000	3.450	3.900
	27x10-12	FIX F1	8.00G-12	227	672	68,9	3.900	3.000	3.000	3.450	3.900
15"	250-15 (250/70-15)	F1	7.0-15	207	715	62,9	4.750	3.650	3.650	4.300	4.750
	250-15 (250/70-15)	FIX F1	7.0-15	207	715	63,5	4.750	3.650	3.650	4.300	4.750
	28x9-15 (8.15-15)	F1	7.0-15	207	689	55,9	3.445	2.650	2.650	3.125	3.445
	28x9-15 (8.15-15)	FIX F1	7.0-15	207	689	57,0	3.445	2.650	2.650	3.125	3.445
	8.25-15	F1	6.5-15	205	814	84,6	4.750	3.650	3.650	4.300	4.750
	8.25-15	FIX F1	6.5-15	205	814	85,5	4.750	3.650	3.650	4.300	4.750
	300-15 (315/70-15)	F1	8.0-15	251	816	104,2	5.850	4.500	4.500	5.310	5.850
	300-15 (315/70-15)	FIX F1	8.0-15	251	816	105,1	5.850	4.500	4.500	5.310	5.850
	355/65-15	F1	9.75-15	297	816	124,9	7.800	6.000	6.000	7.085	7.800
	355/65-15	FIX F1	9.75-15	297	816	125,8	7.800	6.000	6.000	7.085	7.800

* In preparation

(1) Sizes are intended for tyres not fitted on rims;

(2) Capacity values indicated are in reference to FORZA tyres mounted on vehicles whose speed with no cargo is less than 25 km/h (according to E.T.R.T.O. standards);

(3) Only for interior courses inferior to 2.000 metres; if otherwise, contact dealer (according to E.T.R.T.O. standards).